



BUTTERFLY VALVES

LUG

Ref. 112A-DH / PN 10-16

CE



Application

Municipal water distribution networks and hydraulic systems
HVAC installations (Heating, Ventilation and Air Conditioning)
Compressed air systems and pressurized pneumatic lines
Agricultural irrigation networks & automated irrigation systems
End-of-line service
General industrial applications and process systems

Approvals/Standards

Design: BS EN 593
Face to Face: EN 558-1 Series 20
Mounting between flanges: PN10/16 EN 1092-2, ISO 7005-2.
Pressure Tests acc. to EN 12266-1 Rate A. GB/T13927-1992
Pressure Tests: Body: 1,5 x PN. Seat: 1,1 x PN
EU directive 2014/68/EU:
Products excluded, article 1, § 2b up to DN300.
Risk Category I MoD. A from DN350 to DN600

Certifications

CE

Range

DN40-1200, PN10-16



GENERAL CHARACTERISTICS



Concentric disc design.
 Range from DN40 up to DN1200
 Long neck for heat-insulated installations.
 100% Tightness in both directions.
 Low head loss.
 One-piece shaft to avoid breakage due to water hammer.
 Cartridge seat for easy replacement.
 Does not need gaskets for installation.
 Top flange according to ISO 5211.
 10 positions lever.

WORKING CONDITIONS


Maximum working pressure: 16 bar.
 Working temperature:
 - -10°C / 120°C for EPDM seat and CF8M disc.
 - -10°C / 90°C for EPDM seat and GJS400 disc.
 - -10°C / 80°C for NBR seat and CF8M/GJS400 disc.
 Suitable media according to seat and disc material.

Nº	ITEM	MATERIAL (Standard / option)
1	Gearbox	
2	Bushing	PTFE / Bronze
3	O-ring	NBR, EPDM
4	Stem	AISI 420
5	Disc	GJS400-7 / CF8M
6	Seat	EPDM / NBR, FKM, PTFE, EPDM HT
7	Body	GJS400-15 / CF8M
8	Bolts	A2
9	Thrust washer	CARBON STEEL
10	Bolts	CS8.8 / A2-70
	RAL 5015 Painting	Epoxy 250 µm for body
	RAL 9005 Painting	Epoxy 250 µm for disc

Components may be replaced with materials of equivalent or superior grade without prior notice, in accordance with our continuous improvement policy.

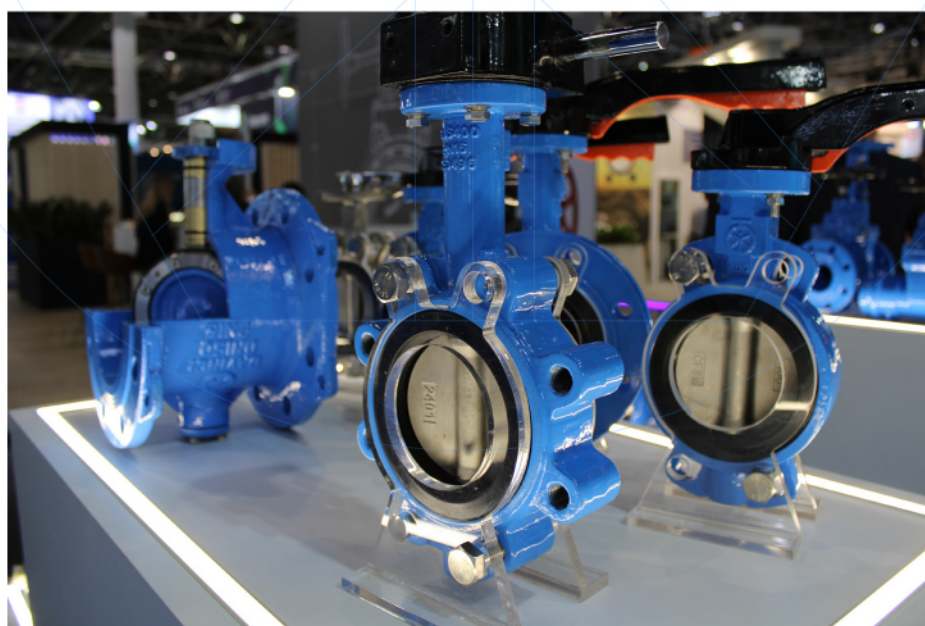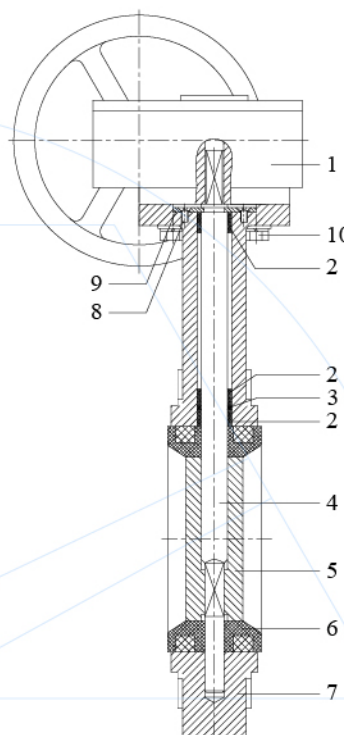

DIMENSIONS

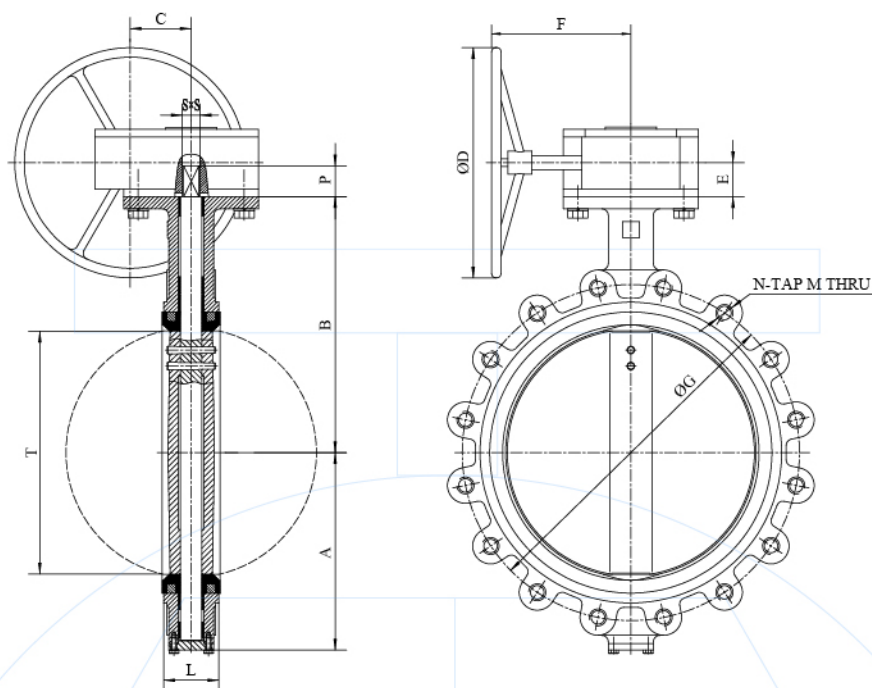


DN	L	A	B	ØC		n-ØM		E	F	G	ØD	S	P	T	ISO 5211	Torque (N·m)		Weight (kg)
				PN10	PN16	PN10	PN16									PN10	PN16	
50	42	76	162	125		4-16		27	144	48	138	9	32	32	F05	17.5	19.2	5.5
65	45	89	174	145		4-16		27	144	48	138	9	32	47	F05	27.7	30.9	6.5
80	45	95	181	160		8-16		27	144	48	138	9	32	65	F05	36.7	39.6	7.7
100	52	114	200	180		8-16		27	144	48	138	11	32	90	F07	56.4	64.8	8.6
125	54	127	213	210		8-16		27	144	48	138	14	32	111	F07	85.4	101.8	11.6
150	56	139	225	240		8-20		27	144	48	138	14	32	145	F07	123.8	147.8	12.8
200	60	177	260	295		8-20	12-20	39	208	66	278	17	38	193	F07	206.6	240.0	24.5
250	66	203	292	350	355	12-20	12-27	39	208	66	278	22	38	241	F10	328.0	380.1	32.5
300	67	242	337	400	410	12-20	12-27	37	225	80	278	22	38	292	F10	478.1	538.0	44.1
350	77	277	368	460	470	16-20	16-27	37	225	80	278	22	45	325	F10	553.6	674.9	59
400	102	308	400	515	525	16-27	16-30	52	291	98	376	27	51	380	F16	870.0	993.4	93
450	114	342	422	565	585	20-27	20-30	52	291	99	376	27	51	428	F16	1297.0	1552.9	119
500	130	374	479	620	650	20-28	20-34	120	252	170	285	27	64	474	F16	1581.7	1804.6	169
600	152	459	562	725	770	20-31	20-37	135	295	195	376	36	70	575	F16	2878.8	3029.9	256
700	165	520	624	840		24-27	24-33	158	335	223	380	46	72	674	F25	3978.1	4797.9	415
800	190	575	672	950		24-30	24-36	158	335	223	380	46	72	771	F25	6597.6	7426.0	545
900	207	635	768	1050		28-30	28-36	163	365	238	420	55	77	839	F25	9395.7	10020.8	770
1000	216	685	823	1160	1170	28-33	28-39	163	365	238	420	55	85	939	F25	14172.8	13555.6	876
1200	276	839	940	1380	1390	32-36	32-45	221	425	310	500	75	150	1125	F30	18566.4	19800.3	1200

The designs, materials and technical specifications indicated herein are subject to modification without prior notice, as part of the continuous development of our manufacturing programme, product refinement and technological advancement.



DIMMENSIONS FOR LEVER AND MODELS

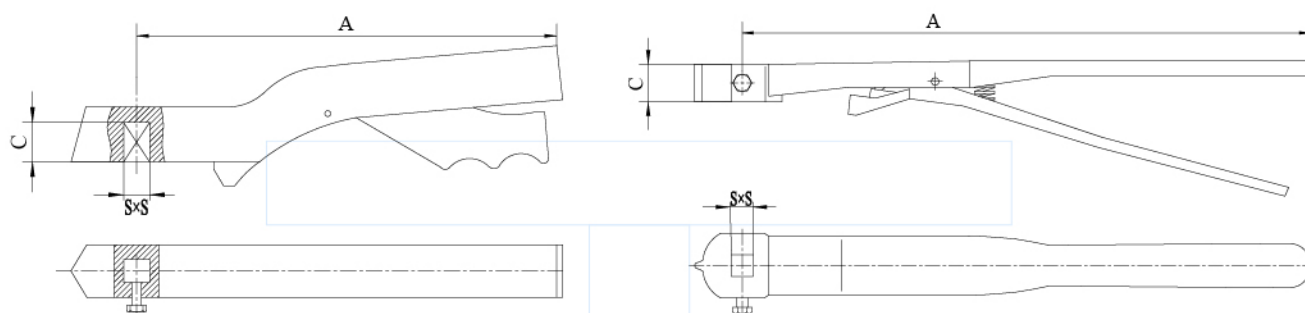


DN	A	S	C min
40-80	198	9	20
100	270	11	22
125-150	270	14	22
200	270	17	22

DN	A	S	C min
250-300	540	22	22



HA MODEL

Ductile cast iron handle.
Galvanized steel plate,
with 10 positions.
Low price.

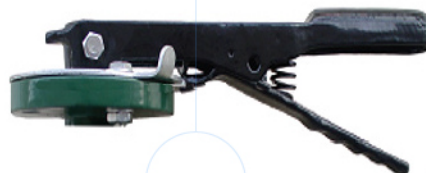

HB MODEL

Ductile cast iron handle.
Galvanized steel plate,
with 10 positions.
With hole for padlock.



HC MODEL

Carbon steel handle.
Galvanized steel plate,
with 10 positions.
Light design.



HD MODEL

Ductile cast iron handle.
ABS plate, with 10 positions.
Low price.



HE MODEL

Ductile cast iron handle.
Galvanized steel plate,
with 10 positions.
High resistance and endurance.





HF MODEL

Aluminum handle.
Aluminum plate, with 10 positions.
Light design and high resistance to
corrosion.




GEARBOX DETAILS

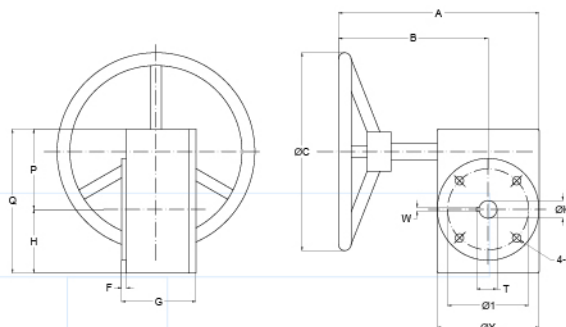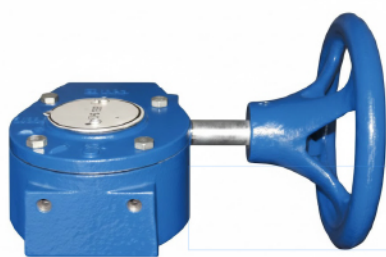

1 STAGE GEARBOX

DN	Torque N·m	Ratio	A	B	C	F	G	H	L	P	Q	M	K	T	W	Y
40-80	170	24 : 1	230	178	144	38	62	53	50	45	125	M6	13	14	3	105
100	170	24 : 1	230	178	144	38	62	53	70	45	125	M8	16	18	5	105
125-150	170	24 : 1	230	178	144	38	62	53	70	45	125	M8	19	21	5	105
200	750	30 : 1	310	235	208	41	78	76	102	63	174	M10	22	25	8	158
250	750	30 : 1	310	235	208	41	78	76	102	63	174	M10	29	32	8	158
300-350	1200	50 : 1	305	226	225	42	80	81	102	81	195	M10	32	35	8	170
400	2500	80 : 1	317	217	291	48	105	125	165	95	255	M20	33	37	10	210
450	2500	80 : 1	317	217	291	48	105	125	165	95	255	M20	38	41	10	210

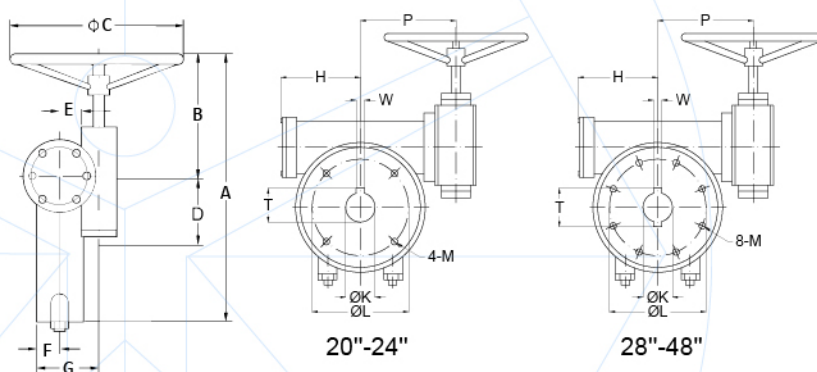

2 STAGES GEARBOX

DN	Torque N·m	Ratio	A	B	C	F	D	E	F	G	H	L	P	M	T	W
500	3000	300 : 1	480	210	285	110	63	52	120	160	165	185	M20	41	44.6	10
600	4000	697 : 1	520	210	285	125	63	57	120	160	165	185	M20	51	55.1	16
700-800	8000	782 : 1	560	220	360	160	78	62	128	160	254	218	M16	55	63.6	16
900	15000	782 : 1	660	255	450	192	120	130	218	200	254	282	M16	75	84.8	20
1000	15000	782 : 1	660	255	450	192	120	130	218	200	254	282	M16	85	95.8	22
1200	26000	768 : 1	825	235	570	300	126	196	322	305	298	418	M20	92	103	25

ITEM

MATERIAL (Standard / option)

Body

Cast Iron / Ductile iron, Aluminun

Gears

Ductile iron / Al-Bronze

Shaft

Carbon steel / Stainless steel



FLOW CHARACTERISTICS

DN	10°	20°	30°	40°	50°	60°	70°	80°	90°
50	0.06	3	7	15	27	44	70	105	115
65	0.1	6	12	25	45	75	119	178	196
80	0.2	9	18	39	70	116	183	275	302
100	0.3	17	36	78	139	230	364	546	600
125	0.5	29	61	133	237	392	620	930	1022
150	0.8	45	95	205	366	605	958	1437	1579
200	2	89	188	408	727	1202	1903	2854	3136
250	3	151	320	694	1237	2049	3240	4859	5340
300	4	234	495	1072	1911	3162	5005	7507	8250
350	6	338	715	1549	2761	4568	7230	10844	11917
400	8	464	983	2130	3797	6282	9942	14913	16388
450	11	615	1302	2822	5028	8320	13168	19752	21705
500	14	791	1647	3628	6465	10698	16931	25396	27908
600	22	1222	2587	5605	9989	16528	26157	39236	43116
700	31	1703	3605	7813	13961	23037	36459	54689	60102
800	100	2436	5272	10636	18025	29440	47622	70876	77897
900	260	3050	6730	12740	20220	32500	52500	79600	87500
1000	313	3665	8089	15942	24299	39056	63093	95660	105154
1200	455	5365	11840	22400	30600	51200	92300	140000	154000





CONTACT US

DAVINCI GATE VALVES ORDER REQUEST

Ref. 112A-DH / PN 10-16



Head Office CHENGDU

Room 3109 Unit 1 Building 2,
No. 68 Dongda Street
Jinjiang District, Chengdu, Sichuan
CHINA

+86 17340168233 +86 19302892712
valves@davincivalves.com

Europe Office MADRID
SPAIN

zuzana@davincivalves.com

WEBSITE

davincivalves.com



YOUR QUALITY WATER PROJECTS PARTNER
For professionals who look for more.